


Indoor / 屋内用 Curve wall transparent LED screen

- ・ シースルータイプの湾曲バージョン
- ・ 曲面ガラスにもカスタム対応可能
- ・ 採光を遮ることなく、室内の明るさ、演出も確保

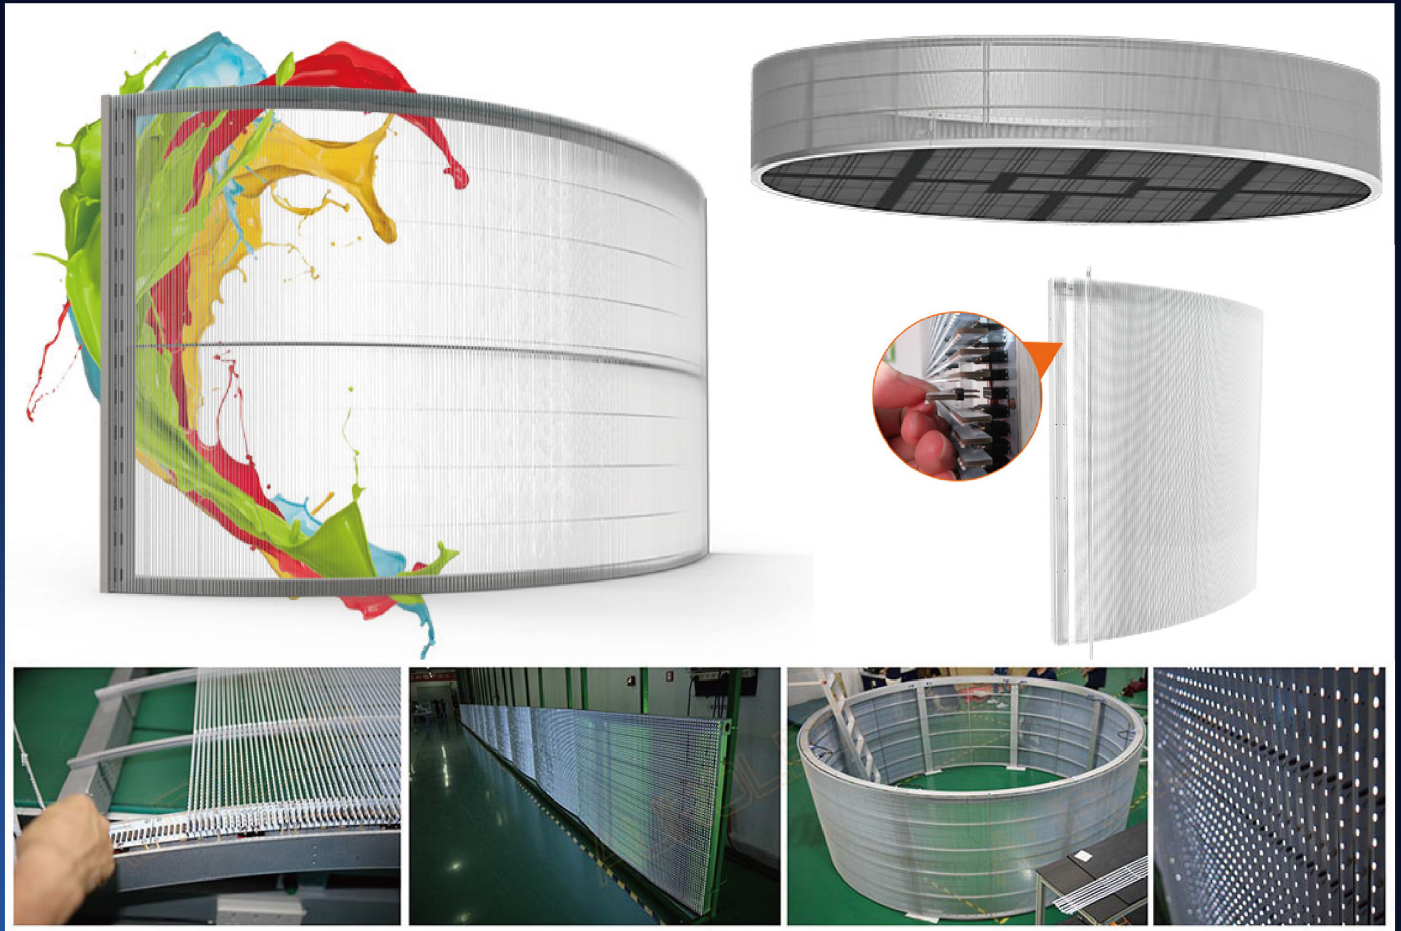

Product Series	SR-ATN-0507	SR-ATN-0608	SR-ATN-08	SR-ATN-10	SR-ATN-12	SR-ATN-16
Pixel Pitch	H-5mm ; V-7mm	H-6mm ; V-8mm	8mm	10mm	12mm	16mm
Pixel Density	28571 dots/m ²	20834 dots/m ²	15625 dots/m ²	10000 dots/m ²	6944 dots/m ²	3906 dots/m ²
LED Configuration	SMD4312 (1R1G1B)	SMD4312 (1R1G1B)	SMD4312 (1R1G1B)	SMD4312 (1R1G1B)	SMD4312 (1R1G1B)	SMD4312 (1R1G1B)
Standard Cabinet Size (WxHxD)	customized shape	customized shape	customized shape	customized shape	customized shape	customized shape
Cabinet Material	Aluminum					
Weight	15kg/m ²	15kg/m ²	13kg/m ²	12kg/m ²	12kg/m ²	10kg/m ²
Transparency	62%	68%	70%	76%	82%	88%
Brightness	5000nit	5000nit	5000nit	5000nit	5000nit	5000nit
Refresh Rate	≧ 1500Hz	≧ 1500Hz	≧ 1500Hz	≧ 1500Hz	≧ 1500Hz	≧ 1500Hz
Max. Power Consumption	800W/m ²	800W/m ²	800W/m ²	800W/m ²	800W/m ²	800W/m ²
Ave. Power Consumption	300W/m ²	300W/m ²	300W/m ²	300W/m ²	300W/m ²	300W/m ²
Horizontal Viewing Angle	160°	160°	160°	160°	160°	160°
Vertical Viewing Angle	160°	160°	160°	160°	160°	160°
Operating Voltage	DC 5V					
Operating Temperature/ Operating Humidity	-10~40°C / 10%-90%					
Input Voltage	AC 100V~240V					